



OPERATION AND MAINTENANCE

DEKO FG SILENT PROFILE

DATE:

SUPPLIER:

SOLUTIONS:

PROJECT:

TEL.:

CLASSIFICATIONS:

EMAIL:

OPERATION AND MAINTENANCE - DEKO FG SILENT PROFILE

FULL GLASS WALL WITH HIGH NOISE REDUCTION IN ALUMINIUM FRAME WITH VERTICAL ALUMINIUM PROFILE JOINTS

MATERIALS

1. GLASS

Dirt and fingerprints can damage the glass surface. The glass wall should be cleaned regularly.


Apply soap with a wash leather wrung out in lukewarm water, with a mild detergent added. Remove excess water with a squeegee. Dry around the edges with a soft cloth. Go to page 3 for detailed instructions in window cleaning.

Remove minor dirt with an ordinary glass cleaner and a soft cloth.

2. RUBBER SEALS

Clean the rubber seals regularly with a cloth wrung out in water with a mild detergent added.

Do not use petroleum or petroleum-based products for cleaning, as they can cause the rubber seals to shrink.

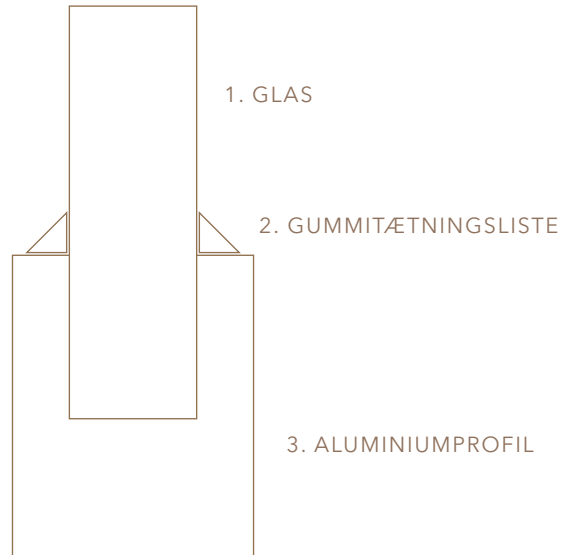

3. ALUMINIUM PROFILES

DEKO glass walls are supplied with powder coated or natural anodised/-eloxerede aluminium profiles.

The surface of the profiles cannot tolerate alkaline detergents or other alkaline substances. If the profiles have been exposed to liquid concrete or mortar, clean off immediately with a cloth wrung out in clean water.

It is important to clean the profiles regularly to maintain their appearance. Cleaning can be performed using a soft cloth wrung out in water with a mild detergent added. Do not use abrasive detergents or scouring sponges, as they will scratch the surface.

WASHING INSTRUCTIONS FOR GLASS

CLEANING GLASS WALLS IN GENERAL:

The glass surface can be scratched. It is therefore important that it is washed and dried correctly. Exercise extra caution the first time, as dust and contaminants from the building site can be attached to the glass, increasing the risk of scratches and damage.

THE FOLLOWING PRECAUTIONS ARE IMPORTANT:

- Avoid the use of sharp objects.
- Rinse with plenty of water.
- Replace water frequently, especially after washing outdoors.

GUIDELINES FOR WASHING GLASS WALLS:

- Use copious amounts of lukewarm/cold water with a mild detergent added.
- Use a new, soft cloth or synthetic sponge for applying soap to the glass.
- Use a new squeegee with intact blade, and a new wash leather to dry off.
- Never use a natural sponge or hard brushes, never add chemicals to the water, e.g. ammonia, alcohol, benzine etc.

PROCEDURE:

- Apply plenty of soapy water to the glass to loosen dirt and contaminants.
- Dry off with a squeegee working from '1' as shown on the diagram.
- Move the squeegee in one direction without changing direction during drying off.
- Wipe of the edges with a wash leather.

